



VHF AND UHF TRANSCEIVERS

IC-F3022T

(VHF transceiver with 10-keypad)

IC-F4022T

(UHF transceiver with 10-keypad)

IC-F3022S

(VHF transceiver without 10-keypad)

IC-F4022S

(UHF transceiver without 10-keypad)



F3022 F4022 Series



128ch/
8 zones

2-Tone, 5-Tone,
CTCSS, DTCSS

VHF 5W
UHF 4W

IP54 rugged
construction

8-character
LCD display

Optional voice
scrambler



Icom Inc.

SIMPLE, RUGGED, VERSATILE FOR T



▲ IC-F3022T

▲ IC-F4022S

Only Icom quality can offer this featured radio. In this compact, rugged design, you'll find a wide range of versatile features such as multiple memory channels, a long-life Lithium-Ion battery and wide frequency coverage. This rugged handheld easily offers reliable performance and communication.

Compact lightweight body

The rounded compact* design fits comfortably in your palm and is light-weight** for carrying around all day. The large size programmable buttons have ample button-pitch to allow blind touch operation.

* 53(W)×120(H)×32.5(D) mm

** 260g including BP-231

IP54 dust-protection and splash resistance

The IC-F3022 series meets IP54 requirements for dust-protection and splash resistance. The aluminum die-cast chassis is the basis for this rugged construction, allowing long-life usage in various environments.

128 memory channels and button control memory channel

The IC-F3022 series has 128 memory channels with 8 zones. Memory channel selection can be made easily with the up/down buttons laid out below the PTT button.

Most popular signalings built-in

Use the built-in 2-Tone, 5-Tone, CTCSS and DTCS capabilities as standard to set up your own talk groups and quiet standby when others are talking.

Multiple 2-Tone, Multiple 5-Tone

Up to ten 2-Tone and eight 5-Tone codes can be decoded on a channel. When a matched tone is received, the following items are programmable for each code.

- Beep sound
- Answer back
- Scan
- Bell icon
- Radio stun/kill

Lithium-Ion battery standard

The IC-F3022 series comes with the BP-231 Li-Ion battery pack as standard. Li-Ion batteries have virtually no memory issues and allow you flexible charging. The optional BP-232 provides a high capacity 2000mAh for longer operating time.

VHF TRANSCEIVERS

IC-F3022T

With 10-keypad

IC-F3022S

Without 10-keypad

UHF TRANSCEIVERS

IC-F4022T

With 10-keypad

IC-F4022S

Without 10-keypad

THE EVERYDAY USER

simple to use but versatile rich light weight body, many attractive signalings, large capacity frequency coverage are standard. Exceeds your expectations with communication quality.

8 programmable buttons

The [P0]–[P3], [▲], [▼], [Monitor] and [Red] buttons are programmable to meet specific needs. The [Red] button on the top panel can be assigned as an emergency trigger.

Alphanumeric display

The 8-character alphanumeric display shows channel, zone, tone code and scanning channel names on the display. A separate row of operational icons indicate battery, signal strength, RX/TX and other radio conditions.

Wide frequency coverage

The IC-F3022 series covers a wide frequency range with one version (136–174, 400–470 MHz). Wide, middle and narrow channel spacing (25, 20, 12.5kHz) is programmable per channel.

Optional board

The IC-F3022 series has a 40-pin expansion socket for adding an optional board. A voice scrambler provides secure conversation and the DTMF decoder features has ANI (Automatic Number Identification) capability, depending on the installed board.

Optional VOX headset

With one of Icom's optional headsets and PTT/VOX unit, the IC-F3022 series offers hands-free operation.

Other features

- New regular charger, BC-171
- TOT (Time-Out-Timer) function and lock out penalty timer
- 8 DTMF autodial memories
- 2 step power saver
- 2 step low battery beep
- Surveillance function temporarily turns off the LED backlight and beep sound
- Normal and priority scan
- 500mW loud and clear audio

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

BATTERY PACKS AND CASE



▲ BP-230 ▲ BP-231 ▲ BP-232 ▲ BP-240

Battery packs	Type and capacity	Operating time* (VHF/UHF)	Output power (VHF/UHF)
BP-230	Li-Ion 7.4V/ 800mAh	6 hours	5W/4W
BP-231	Li-Ion 7.4V/1150mAh	9 hours	5W/4W
BP-232	Li-Ion 7.4V/2000mAh	15.5 hours	5W/4W
BP-240	AAA (LR03) batteries × 6	–	1W

* Operating time is approximate time (at 20°C). Tx: Rx: standby=5:5:90. Power save on.

REGULAR CHARGER



▲ BC-147 ▲ BC-171

BC-171 DESKTOP CHARGER + BC-147 AC ADAPTER
Charges the battery pack in 8–10 hours (approx.).

RAPID CHARGER



▲ BC-145 ▲ BC-160

BC-160 DESKTOP CHARGER + BC-145 AC ADAPTER
Charges the BP-231 in 2 hours (approx.).
BC-119N + AD-106 + BC-145 is also available. : Charges the BP-231 in 2 hours (approx.).

POWER SUPPLY CABLES



▲ CP-17L ▲ OPC-515L

CP-17L CIGARETTE LIGHTER CABLE, OPC-515L DC POWER CABLE
For use with the BC-160 or BC-119N. (12–16V DC required).

MULTI-CHARGER



▲ BC-121N+AD-106 (6 pcs.) ▲ OPC-656 ▲ BC-157

BC-121N MULTI-CHARGER + AD-106 CHARGER ADAPTER + BC-157 AC ADAPTER
Rapidly charges up to 6 battery packs (Six AD-106s are required). Charges the BP-231 in 2 hours (approx.).
OPC-656 DC POWER CABLE :For use with the BC-121N. (12–20V DC required).

BELT CLIPS AND LEATHER BELT HANGERS



MB-93 : Swivel type belt clip.
MB-94 : Alligator type. Same as supplied.
MB-96N : Swivel type belt hanger.
MB-96F : Fixed type belt hanger.

HEADSETS and PTT/VOX UNIT




HS-94 : Earhook headset with flexible boom microphone.
HS-95 : Behind-the-head headset with flexible boom microphone.
HS-97 : Throat microphone fits around your neck and picks up speech vibration.
VS-1L : PTT/VOX unit. Required when using these headsets with the transceiver.

SPEAKER-MICROPHONES



HM-153L : Durable earphone-microphone with revolving clip.
HM-158L : Compact and durable body with screw-type connector.
HM-159L : Full size durable speaker microphone.

INTERNAL UNITS

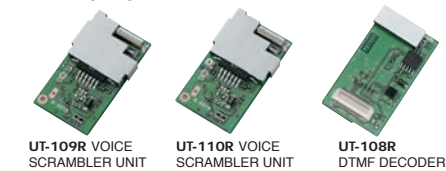


UT-109R : Up to 32 scrambling codes are available. 40-pin type.
UT-110R : Up to 1020 scrambling codes are available. 40-pin type.
UT-108R : Provides DTMF selective call and ANI capabilities. 40-pin type.

SP-13 EARPHONE



Provides clear audio in noisy environments.

STUBBY ANTENNAS



STUBBY ANTENNAS
• **FA-SC56VS**: 150–162MHz, 80mm
• **FA-SC57VS**: 160–174MHz, 80mm
• **FA-SC73US**: 450–490MHz, 60mm
ANTENNAS
• **FA-SC25V**: 136–150MHz
• **FA-SC55V**: 150–174MHz
• **FA-SC25U**: 400–430MHz
• **FA-SC57U**: 430–470MHz

SPECIFICATIONS

GENERAL		RECEIVER	
• Frequency range	:	• Intermediate frequency	: 1st 46.35MHz 2nd 450kHz
IC-F3022T/S	136–174MHz	• Sensitivity	: –4dB μ V typ. (emf; at 20dB SINAD)
IC-F4022T/S	400–470MHz	• Squelch sensitivity	: –4dB μ V typ. (emf; at threshold)
• Number of channels	: 128 channels/8 zones	• Adjacent channel selectivity	VHF : 76/75/66dB typ. (Wide/mid/narrow) UHF 74/73/64dB typ. (Wide/mid/narrow)
• Channel spacing	: 12.5/20/25kHz	• Spurious response	: 70dB min.
• PLL channel step	: 2.5kHz, 3.125kHz	• Intermodulation	: 67dB typ.
• Antenna impedance	: 50 Ω	• Hum and noise ratio	VHF : 60/58/55dB typ. (Wide/mid/narrow) UHF 57/55/51dB typ. (Wide/mid/narrow)
• Usable temperature range	: –25°C to +55°C	• Audio output power	: 500mW typ. (at 5% distortion with an 8 Ω load)
• Power supply requirement	: 7.2V DC	• External speaker connector	: 2-conductor 3.5 (d) mm/8 Ω
• Current drain (at 7.2V DC; approx.):			
Transmit	VHF/UHF 1.5A/1.5A (at 5W/4W)		
Receive	Stand-by 72mA		
	Rated output 250mA		
• Dimensions (with BP-231)	: 53 (W) \times 120 (H) \times 32.5 (D) mm (projections are not included)		
• Weight (approx.)	: 260g (with BP-231)		

TRANSMITTER


• Output power	: 5W (VHF), 4W (UHF)
• Max. frequency deviation	: \pm 5.0/ \pm 4.0/ \pm 2.5kHz (Wide/mid/narrow)
• Frequency error	: \pm 2.5ppm
• Spurious emissions	: 0.25 μ W (\leq 1GHz) 1.0 μ W ($>$ 1GHz)
• Adjacent channel power	VHF : 80/80/70dB typ. (Wide/mid/narrow) UHF 76/74/68dB typ. (Wide/mid/narrow)
• Audio harmonic distortion	: 1.5% typ. (AF 1kHz, 40% deviation)
• Modulation limiting	: 60–100% of max. deviation
• Ext. microphone connector	: 3-conductor 2.5 (d) mm/2.2k Ω

Measurements made in accordance with EN 300-086.

All stated specifications are subject to change without notice or obligation.

All trademarks are the properties of their respective holders.

SUPPLIED ACCESSORIES (May differ according to version)

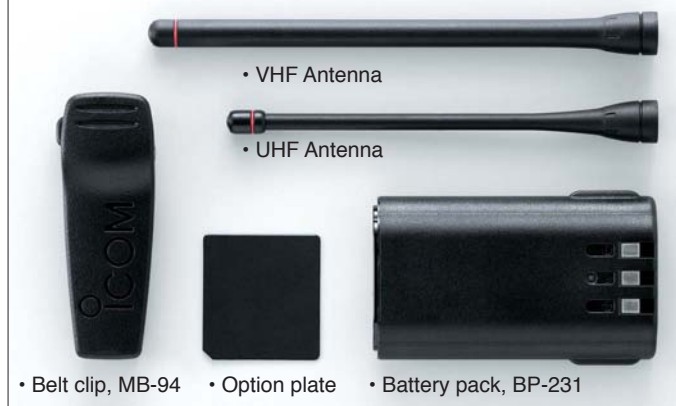

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

2380 116th Avenue NE, \square
Bellevue, WA 98004, U.S.A. \square
Phone \square +1 (425) 454-8155 \square
Fax \square : +1 (425) 454-1509 \square
E-mail \square sales@icomamerica.com \square
URL \square : <http://www.icomamerica.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17, \square
Delta, B.C., V4K 5B8, Canada \square
Phone \square +1 (604) 952-4266 \square
Fax \square : +1 (604) 952-0090 \square
E-mail \square info@icomcanada.com \square
URL \square : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575 \square
Unit 1 / 103 Garden Road, \square
Clayton VIC 3168 Australia \square
Phone \square +61 (03) 9549 7500 \square
Fax \square : +61 (03) 9549 7505 \square
E-mail \square sales@icom.net.au \square
URL \square : <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki, \square
Auckland, New Zealand \square
Phone \square +64 (09) 274 4062 \square
Fax \square : +64 (09) 274 4708 \square
E-mail \square inquiries@icom.co.nz \square
URL \square : <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment \square
Himmelgeister Str. 100, \square
D-40225 Düsseldorf, Germany \square
Phone \square +49 (0211) 346047 \square
Fax \square : +49 (0211) 333639 \square
E-mail \square info@icomeurope.com \square
URL \square : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer" \square
08190, Sant Cugat del Valles, Barcelona, Spain \square
Phone \square +34 (93) 590 26 70 \square
Fax \square : +34 (93) 589 04 46 \square
E-mail \square icom@icomspain.com \square
URL \square : <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, \square
Kent, CT6 8LD, U.K. \square
Phone \square +44 (01227) 741741 \square
Fax \square : +44 (01227) 741742 \square
E-mail \square info@icomuk.co.uk \square
URL \square : <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, 1, \square
Rue Brindejonc des Moulinais BP 5804, \square
31505 Toulouse Cedex, France \square
Phone \square +33 (5) 61 36 03 03 \square
Fax \square : +33 (5) 61 36 03 00 \square
E-mail \square icom@icom-france.com \square
URL \square : <http://www.icom-france.com>

Icom Polska

Sopot, 3 maja 54, Poland \square
Phone \square +48 (58) 550 7135 \square
Fax \square : +48 (58) 551 0484 \square
E-mail \square icompolkska@icompolkska.pl \square
URL \square : <http://www.icompolkska.com.pl>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road, \square
Taipei, Taiwan, R.O.C. \square
Phone \square +886 (02) 2559 1899 \square
Fax \square : +886 (02) 2559 1874 \square
E-mail \square sales@asia-icom.com \square
URL \square : <http://www.asia-icom.com>

Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding \square
Road, Haidian District, Beijing, 100039, China \square
Phone \square +86 (010) 5889 5391/5392/5393 \square
Fax \square : +86 (010) 5889 5395 \square
E-mail \square bjicom@bjicom.com \square
URL \square : <http://www.bjicom.com>

Your local distributor/dealer:

Communication Specialists Ltd.
Unit 20
Murrel Green Business Park,
London Road, Hook,
Hampshire, United Kingdom.
RG27 9GR

Tel +44 (0) 1256 766600
Fax +44 (0) 1256 766500

www.talkie-walkie.co.uk
info@comm-spec.co.uk