

ICOM

PMR446 FM TRANSCEIVER

IC-4088SR

PMR446
FM
TRANSCEIVER

Meets
MIL-STD 810

Professional Quality in Personal Communications

- 8 channels and 38 group codes
- Splash resistant construction, equivalent to JIS Grade 4 for outdoor use
- Built-in voice scrambler provides secure private communications
- Economical 3 alkaline cells or optional rechargeable Ni-Cd battery assembly
- Charge and use at the same time with various optional extras
- 'Smart-ring' and 'Call-ring', plus Time-out-timer function
- Compact body and reliable performance

Icom Inc.

SPECIFICATIONS

- Number of channels : 8 (simplex; 446.00625–446.09375MHz)
- Mode : FM (F3E)
- Frequency stability : $\pm 2.5\text{kHz}$, $\pm 5.6\text{ppm}$
- Frequency resolution : 12.5kHz
- Battery requirements : 3 \times AA (R6) alkaline cells ; or optional BP-202
- External power supply : 6.0V DC $\pm 5\%$ (with BC-149D, CP-18E)
- Current drain (at 4.5V DC) : Less than 500mA
- Operating Temp. range : -20°C to $+55^{\circ}\text{C}$
- Number of CTCSS freq. : 38 (67.0–250.3Hz)
- Weight (approx.) : 200g (includes 3 alkaline cells)
- Output power : 500mW ERP
- External MIC connector : 3-conductor 2.5 (d) mm/ 2.2k Ω
- Sensitivity (12dB SINAD) : 0.158 μV typical
- Audio output power : More than 100mW at 10% distortion with an 8 Ω load
- External SP connector : 3-conductor 3.5 (d) mm/ 8 Ω

• Battery life (Tx:Rx:Standby=1:1:8) :

Battery type	Battery life
3 alkaline cells	approx. 28 hrs.
Optional BP-202	approx. 10 hrs.

• Communication range* : Up to 3km (approx.) (Wide, open space)


* Communication range may differ depending on weather conditions, etc.

Applicable U.S. Military Specifications

Icom makes rugged products that meet MIL-STD requirements and strict environmental standards as follows.

Standard	MIL 810 C		MIL 810 D		MIL 810 E		MIL 810 F	
	Method	Proc.	Method	Proc.	Method	Proc.	Method	Proc.
Low Pressure	500.1	I	500.2	I, II	500.3	I, II	500.4	I, II
High Temp.	501.1	I	501.2	I, II	501.3	I, II	501.4	I, II
Low Temp.	502.1	I	502.2	I, II	502.3	I, II	502.4-3	I, II
Temp. Shock	503.1	I	503.2	I	503.3	I	503.4	I
Solar Radiation	505.1	I, II	505.2	I, II	505.3	I, II	505.4	I, III
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	I
Dust	510.1	I	510.2	I	510.3	I	510.4	I
Vibration	514.2	VIII, X	514.3	I	514.4	I	514.5	I
Shock	516.2	I, II, V	516.3	I, IV	516.4	I, IV	516.5	I, IV

DIMENSIONS

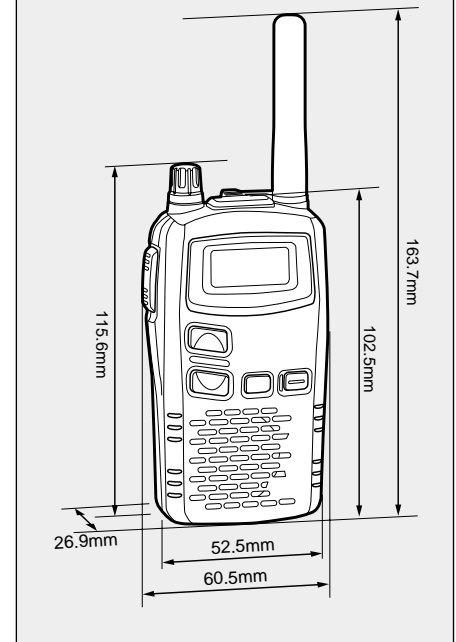

All stated specifications are subject to change without notice or obligation.

* Simple licence is required in some countries. Voice scrambler not available in some countries.

OPTIONS




Install into the battery cell space in the transceiver.
3.6V/700mAh



6V DC, 1A output AC adapter. Charges the BP-202, while operating the radio.



6V DC, 2A output from 12V cigarette lighter socket with internal DC-DC converter.

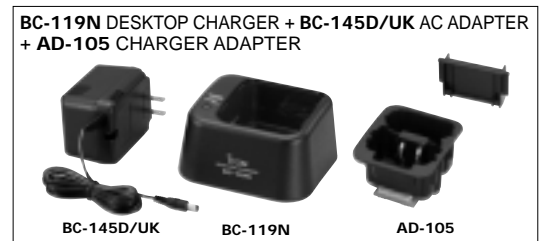

Rapidly charges installed Ni-Cd battery cell assembly, BP-202. The charger adapter and the AC adapter supplied with the BC-119N depending on version. Charging time: 75 to 85 min.



- HM-46** : Compact and lightweight. Equipped with an earphone jack.
- HM-75A** : Allows you to remotely select operating channels, etc.
- HM-131** : Durable body. Equipped with an earphone jack and revolving clip.
- HM-128** : Light weight and compact earphone-microphone with PTT switch that clips to your lapel.



- HS-85** : For hands-free operation. Includes VOX, PTT and "one-touch" PTT with a time-out timer.
- VS-1** : PTT/VOX unit. Required when using the HS-94, HS-95 and HS-97 with the transceiver.
- HS-94** : Earhook headset with flexible boom microphone.
- HS-95** : Behind-the-head headset with flexible boom microphone.
- HS-97** : Throat microphone fits around your neck comfortably.

Communication Specialists Ltd.
Unit 20,
Murrell Green Business Park,
London Road, Hook,
Hampshire, United Kingdom.
RG27 9GR

Tel +44 (0) 1256 766600
Fax +44 (0) 1256 766500

www.walkie-talkie.co.uk
info@comm-spec.co.uk